


# Radar NX

RADAR NX	
JTC	2019-12-04 12:43:53
LOCAL	2019-12-04 13:43:53
NAVIGATION	
LAT	N 54° 21.716'
LON	E 010° 08.695'
HDG GYRO2 (T)	359.8 °
ROT GYRO2	0.0 °/min
COG LOG1	000.0 °
SOG LOG1	10.0 kn
CTW LOG1	359.8 °
STW LOG1	10.0 kn
RADAR	
NAME	X-BAND
FREQ BAND	X-BAND
STATE	TX MASTER

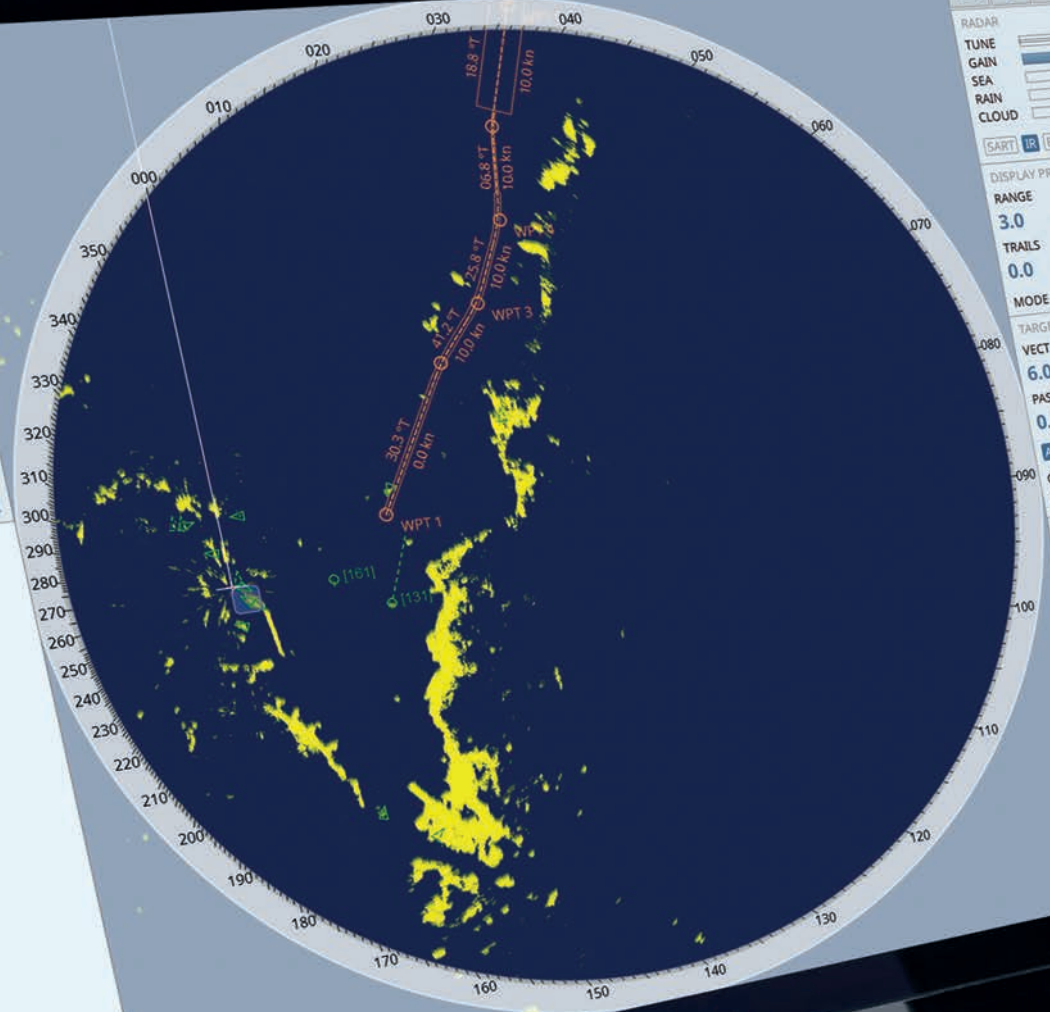

RADAR	
TUNE	
GAIN	
SEA	
RAIN	
CLOUD	
SART IR EXP SC	
DISPLAY PRESENTATION	
RANGE	RR
3.0	NM
TRAILS	
0.0	min
MODE	STA
TARGET PRESENTATION	
VECT TIME	TI
6.0	min
PAST POSN	
0.0	min
ASSOC	WATON
CPA	NM
0.1	NM
ERBL	PI
TGT	TI
CHRT	
CUR-SOR	
ALERT	


RNG	0.007 NM	ETA	12:43:55	hh:mm:ss
BRG	174.45 °T	TTG	00:00	hh:mm
LAT	N 54° 21.708'			
LON	E 010° 08.694'			

# The upmost in maritime collision avoidance

## Radar NX

Radar NX is the new Anschütz radar application, designed in accordance with human-centered design. Radar NX features an advanced tracker and clutter suppression that offer high performance collision avoidance assistance under any weather and traffic condition.

### Key Benefits



#### High performance collision avoidance

Navigational safety is built upon a clear, precise presentation of the traffic situation.

- Modern, clear-structured user interface with chart underlay capability simplifies interpretation
- Advanced target tracking and raw data processing at every single console deliver full situation awareness
- Unique, patented technologies optimize target detection, filtering and presentation



#### Safe and efficient navigation

Advanced functions (known from "INS") support safe navigation and efficient watchkeeping.

- High performance system-wide target management and target association
- Consistent use of qualified data and consistent alert handling
- Navigators receive a validated picture of the prevalent situation for right decision making
- Less workload and distraction



#### Secure and future-proof investment

Ready for future: modular features enhancements and compliance with standards.

- Fully type approved according to IEC-62388
- Future-proof hardware and operating system
- Ongoing application compliance (e.g. new test standards)
- Growing scope of modular features, easy to update
- Choice between classical navigation and solid-state radars
- Global service network in case you need help

Left-hand side: Indication only

Navigation data, incl. source and quality indication

Quick access bar with navigation tools

Function related menus

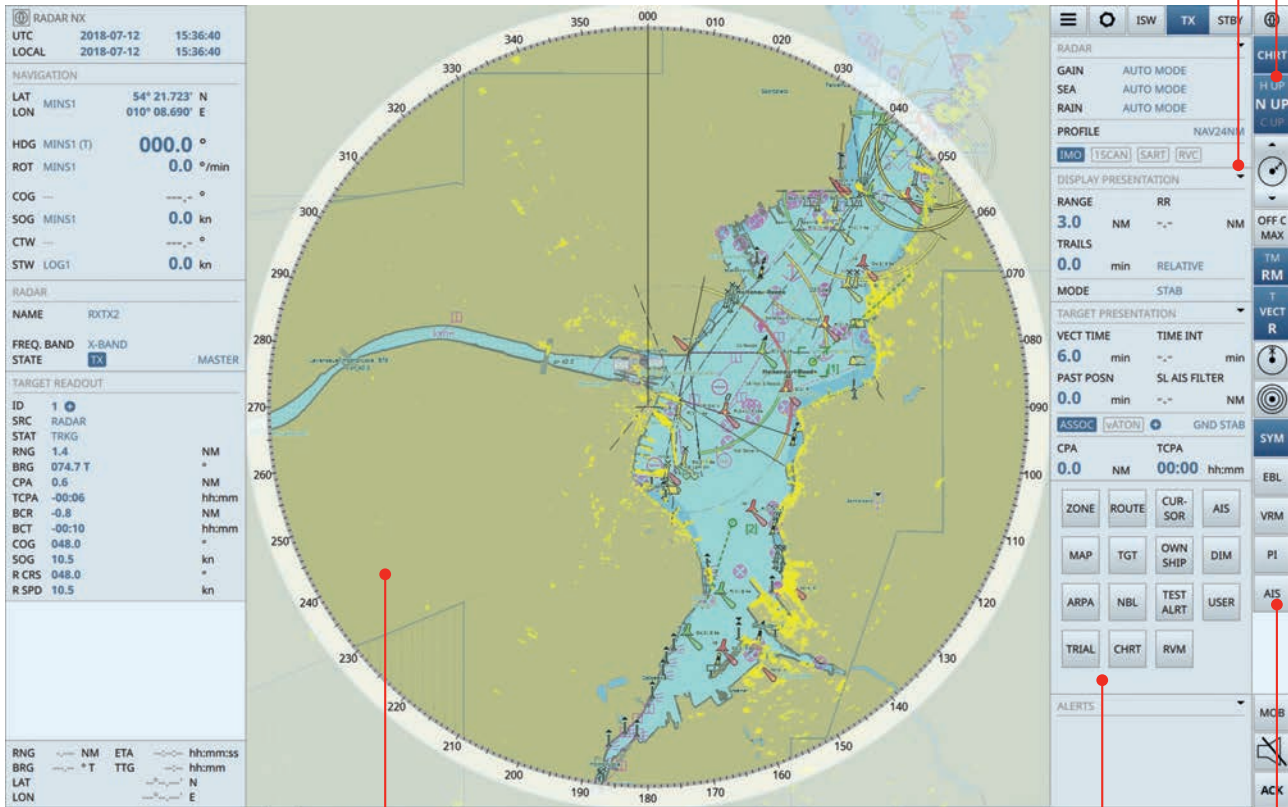


Chart radar function

Tile menu with flat hierarchy

Drag and drop navigation tools


Right-hand side: Indication & operation

# Main Features

## High performance collision avoidance, easy to operate.

- High performance thanks to advanced target tracking (derived from commercial small target tracking application), target association and target management
- Unique automatic clutter suppression for a clear target display under any condition (CFAR technology, "Cloud" atmospheric clutter reduction)
- Individual PPI organization and filtering on each console thanks to the network wide distribution and local processing of raw video
- Chart radar (electronic sea chart underlay for better situational awareness)
- Sortable and filterable target lists
- Advanced, industry leading parallel index line (PIL) functionality with up to 99 PILs
- User profiles to store favorite settings
- Radar video merging of multiple radar sensors (and distribution to ECDIS) A "virtual transceiver" controls and merges the video of multiple radars. The user experiences a single seamless 360° image, and thus an unobstructed radar that significantly improves collision avoidance.

Learn more

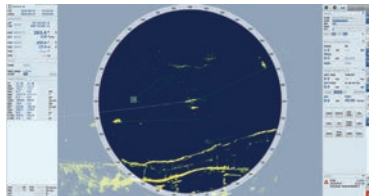


Radar NX improves collision avoidance.

Visit the website and experience the functionality of our Radar NX / Chart Radar NX application  
[www.anschuetz.com/radar-nx](http://www.anschuetz.com/radar-nx)

## Flexible and scalable system design

The Radar NX application can be applied for a single radar workstation, but also as part of a Synapsis NX multifunctional workstation. The Synapsis NX series contains navigational application software for ECDIS, conning and (chart-) radar. It also introduces a network infrastructure that reduces complexity, improves reliability, and simplifies installation and maintenance.

The system consists of up to five active radar transceivers, eight multifunctional workstations and additional displays and radar planning stations. All workstations use high performance small marine computers and wide-screen, glass-front TFT displays in various sizes. Multi-touch is available, where required. The function of a workstation is defined by application software modules and can be adapted or expanded at any time.

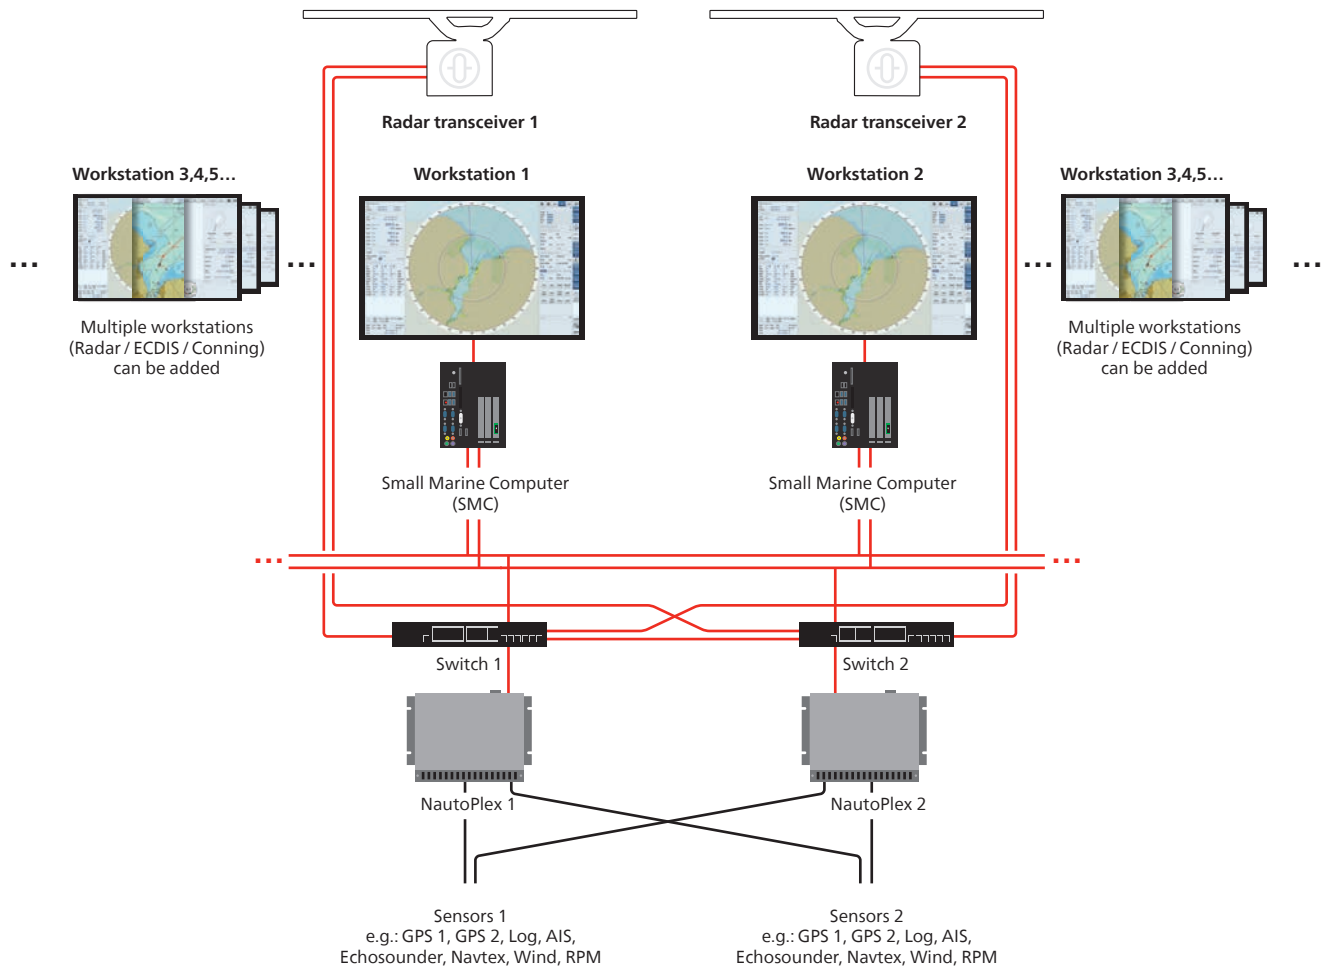

### Type-approved with the following radar transceivers:

- NautoScan NX (NSX) X-Band navigation radars with 6ft / 8ft antenna and up / down transceiver, with high speed option
- NautoScan NX (NSX) S-Band navigation radars with 12ft antenna and up / down transceiver
- Terma SCANTER 2602 / 6002 solid-state X-Band radar for high performance navigation

Learn more



#### NautoScan NX Radars

The NautoScan NX network radar transceivers distribute the radar raw video via Ethernet to an unlimited number of radar workstations on the bridge. Visit the website [www.anschuetz.com/nsx](http://www.anschuetz.com/nsx)